

CERTIFICATE OF CONFORMITY

Issued to: GoodWe Technologies Co., Ltd.
No.90 Zi Jin Rd., New District, Suzhou, 215011, China

For the product: Grid-Tied PV Inverter

Trade name: **GOODWE**

Type/Model: GW150K-GT-G10

Ratings: See Annex

Manufactured by: GoodWe Technologies Co., Ltd.
No.90 Zi Jin Rd., New District, Suzhou, 215011, China

Requirements: IEC 61683:1999
EN 50530:2010+A1:2013
IEC 62891: 2020
IEC 60068-2-1:2007
IEC 60068-2-2:2007
IEC 60068-2-14:2023
IEC 60068-2-30:2005
IEC 60068-2-64:2008+A1:2019

This Test Certificate is granted on account of an examination by DEKRA, the results of which are laid down in a confidential file no. 6214641.50(A-B), 6214641.53, 6214641.54


The examination has been carried out on one single specimen of the product. The Attestation does not include an assessment of the manufacturer's production. Conformity of this production with the specimen tested by DEKRA is not the responsibility of DEKRA.

This Test Certificate expires at the latest on 18 August 2030 or expires upon withdrawal of one of the above mentioned standards.

Shanghai, 18 August 2025


Certificate Number: 6214641.01 V1.1COC

DEKRA Testing and Certification (Shanghai) Ltd.



Kreny Lin
Certification Manager

© Integral publication of this certificate and adjoining reports is allowed

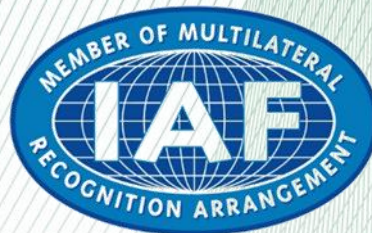

PCA-141

DEKRA Testing and Certification (Shanghai) Ltd.

No.250, Jiangchangsan Road, Jing'an District, Shanghai, 200436 People's Republic of China

T +86 21 6056 7600 F +86 21 6056 7555 www.dekra-product-safety.com

ESA-CER-F021 v4.1

Document no. : 6214641.01 V1.1COC

Ratings of the test product:

Operating temperature range: - 30°C to + 60°C

Protective class: I

Ingress protection rating: IP66

OVC: DC II / AC III

Power factor range (adjustable): ~1 (0.8 leading...0.8 lagging)

GW150K-GT-G10

PV Input: Max 1100 Vdc, MPPT voltage range: 180-1000 Vdc, Max 42*10 A, Isc PV: 52.5*10 A

AC Output: rated voltage: 220 / 380 Vac, 230 / 400 Vac, 240 / 415 Vac, 277 / 480 Vac, 3L/N/PE or 3L/PE,
frequency: 50 / 60 Hz, Max current: 250.7 A@380 V, 238.2 A@400 V, 229.6 A@415 V, 198.5 A@480 V, Max
165 kVA, rated active power: 150 kW

-----END-----