







NO	Model	Nominal Voltage(V)	Nominal Capacity (10HR)	CCA (-18°C)	Dimension (mm)			Weight (±3% Kg)	Polarity	Terminal Type	Container Material
					Length	Width	Height				
1	12N2.5L-BS	12	2.5	25	80	71	104	1.13		J	ABS
2	12N5-BS	12	5.0	50	119	60	127	1.9		A	ABS
3	12N6.5-BS	12	6.5	70	139	66	103	2.03		G	ABS
4	12N7B-BS	12	7.0	70	147	61	129	2.3		A	ABS
5	12N7-BS	12	7.0	70	138	77	124	2.45		A	ABS
6	12N9-BS	12	9.0	80	138	77	135	2.76		A	ABS
7	YIX30L-BS	12	30	300	166	126	175	8.2		C	ABS
8	YT4B-BS	12	2.3	40	113	38.5	86	0.9		I	ABS
9	YT7B-BS	12	6.5	70	150	65	95	2.12		D	ABS
10	YT9B-BS	12	8.0	80	150	70	105	2.4		C	ABS
11	YT12B-BS	12	10	100	150	70	130	3.0		E	ABS
12	YTX4L-BS	12	4.0	40	114	70	86	1.43		D	ABS
13	YTX5L-BS	12	5.0	50	114	70	108	1.8		D	ABS
14	YTX7A-BS	12	7.0	90	150	87	95	2.46		C	ABS
15	YTX7L-BS	12	7.0	70	114	71	131	2.4		D	ABS
16	YTX9-BS	12	8.0	80	150	87	106	2.8		C	ABS
17	YTX12-BS	12	12	150	150	87	132	3.6		C	ABS
18	YTX14	12	12	180	150.5	87	145	4.85		H	ABS
19	YTX14AH-BS	12	12	180	134	89	163	4.1		C	ABS
20	YTX14-BS	12	14	160	150	87	148	4.32		C	ABS
21	YTX16-BS	12	15	180	150	87	163	4.75		C	ABS
22	YTX20L-(18Ah)	12	18	200	175	87	155	5.8		C	ABS
23	YTX20L-(20Ah)	12	20	200	175	87	155	6.25		C	ABS
24	YTZ10-BS	12	8.6	90	150	87	95	2.7		C	ABS
25	YTZ12-BS	12	11.2	120	150	87	106	3.2		C	ABS

Notes:

*Values are subject to variation of +/- 5% in normal manufacturing processes.

*Technical specifications and the product line above could be changed without prior notice.

Battery Picture

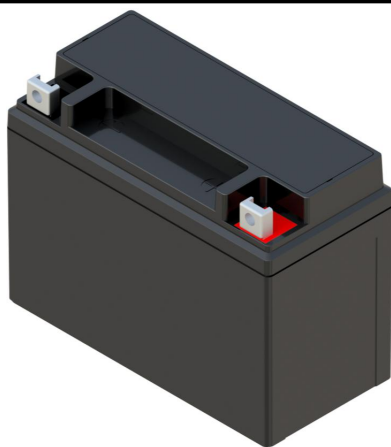

Technical Advantages

- Maintenance-free ; no need to add water.
- Adopts high-end production technologies and a special structural design with reliable sealing, which prevents liquid leakages.
- Excellent cold cranking performance.
- Better deep discharge and superior start-up capability even in low state of charge.
- Unique grid-design technology with good corrosion resistance.
- Lead-calcium alloy, AGM technology, low self-discharge.
- Extremely compact assembly, no active material shedding.
- Stable battery performance and long service life.

Terminal Configurations

Terminal Type	Front view	Side view	Top view	Back view	Battery Model
A					12N5-BS; 12N7B-BS; 12N7-BS; 12N9-BS
B					Other Model
C					YITX30L-BS; YT9B-BS; YTX7A-BS; YTX9-BS; YTX12-BS; YTX14AH-BS; YTX14-BS; YTX16-BS; YTX20L-(18Ah); YTX20L-(20Ah); YTX20-BS; YTX21-BS
D					YT7B-BS; YTX4L-BS; YTX5L-BS; YTX7L-BS
E					YT12B-BS
F					Other Model
G					12N6.5-BS
H					YTX14
I					YT4B-BS
J					12N2.5L-BS