


# HOUSE HOLDER AC CONTACTOR

Small size, brand new design





Space  
optimization

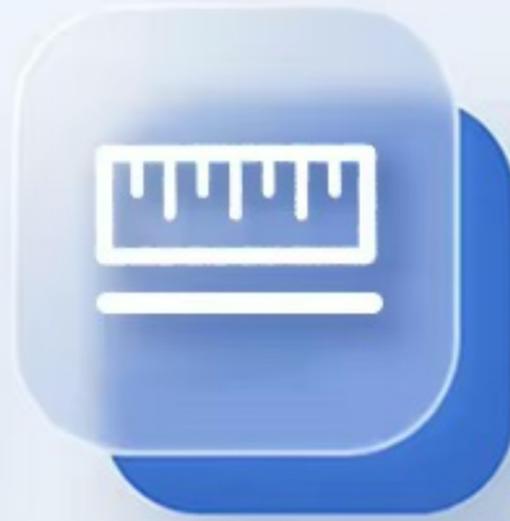

Installation  
standard



ON/OFF  
indication



Energy consumption  
reduction




Quality  
Assurance



Flame retardant  
material

# BREAKING INSTRUCTIONS

Adopting a new type of disconnection display  
the indicator light is clear at a glance

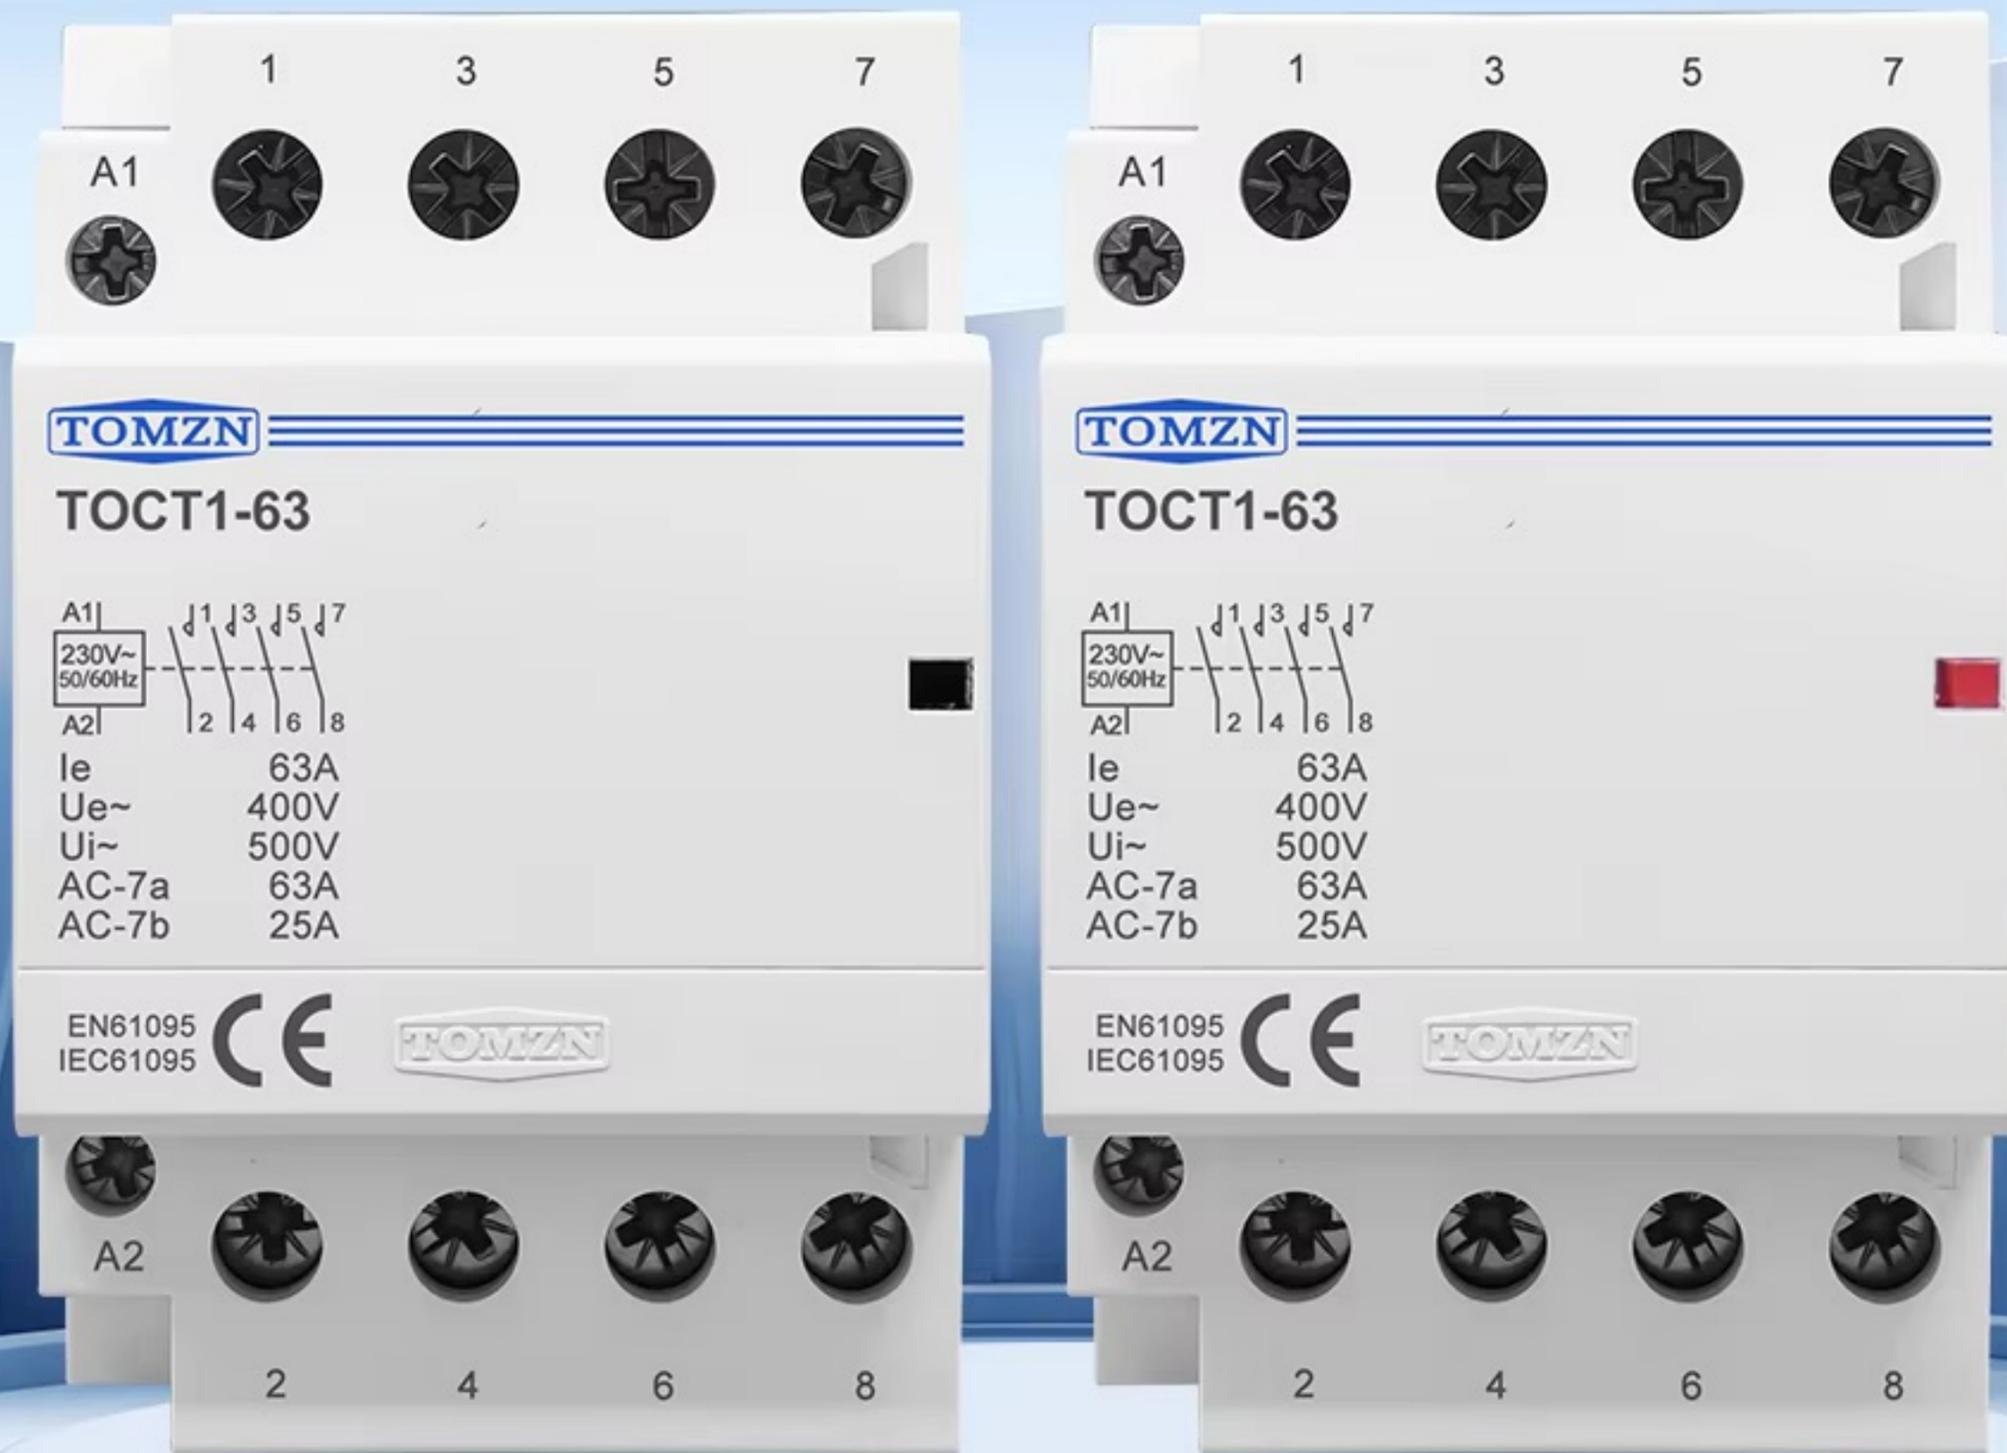

# SMALL SIZE AND BIG PERFORMANCE

## 70% SMALLER IN SIZE

Compared with traditional contactor volume  
70% reduction, easy to install



# VERY SILENT LESS THAN 15DB

No noise, less than 15dB, Safe and secure use

< 15dB



# 75% REDUCTION IN ENERGY CONSUMPTION

Energy saving and environmental protection Compared with traditional contactors energy consumption is reduced by 75%

Energy consumption



Traditional contactor

TOCT1 contactor



# FLAME RETARDANT ENCLOSURE

Good heat resistance. Even when encountering flames it will only carbonize but will not catch fire.




# RAIL INSTALLATION

Standard guide rail 35MM, can be combined with circuit breaker and installed in the distribution box



# EASY WIRING DIY BY YOURSELF

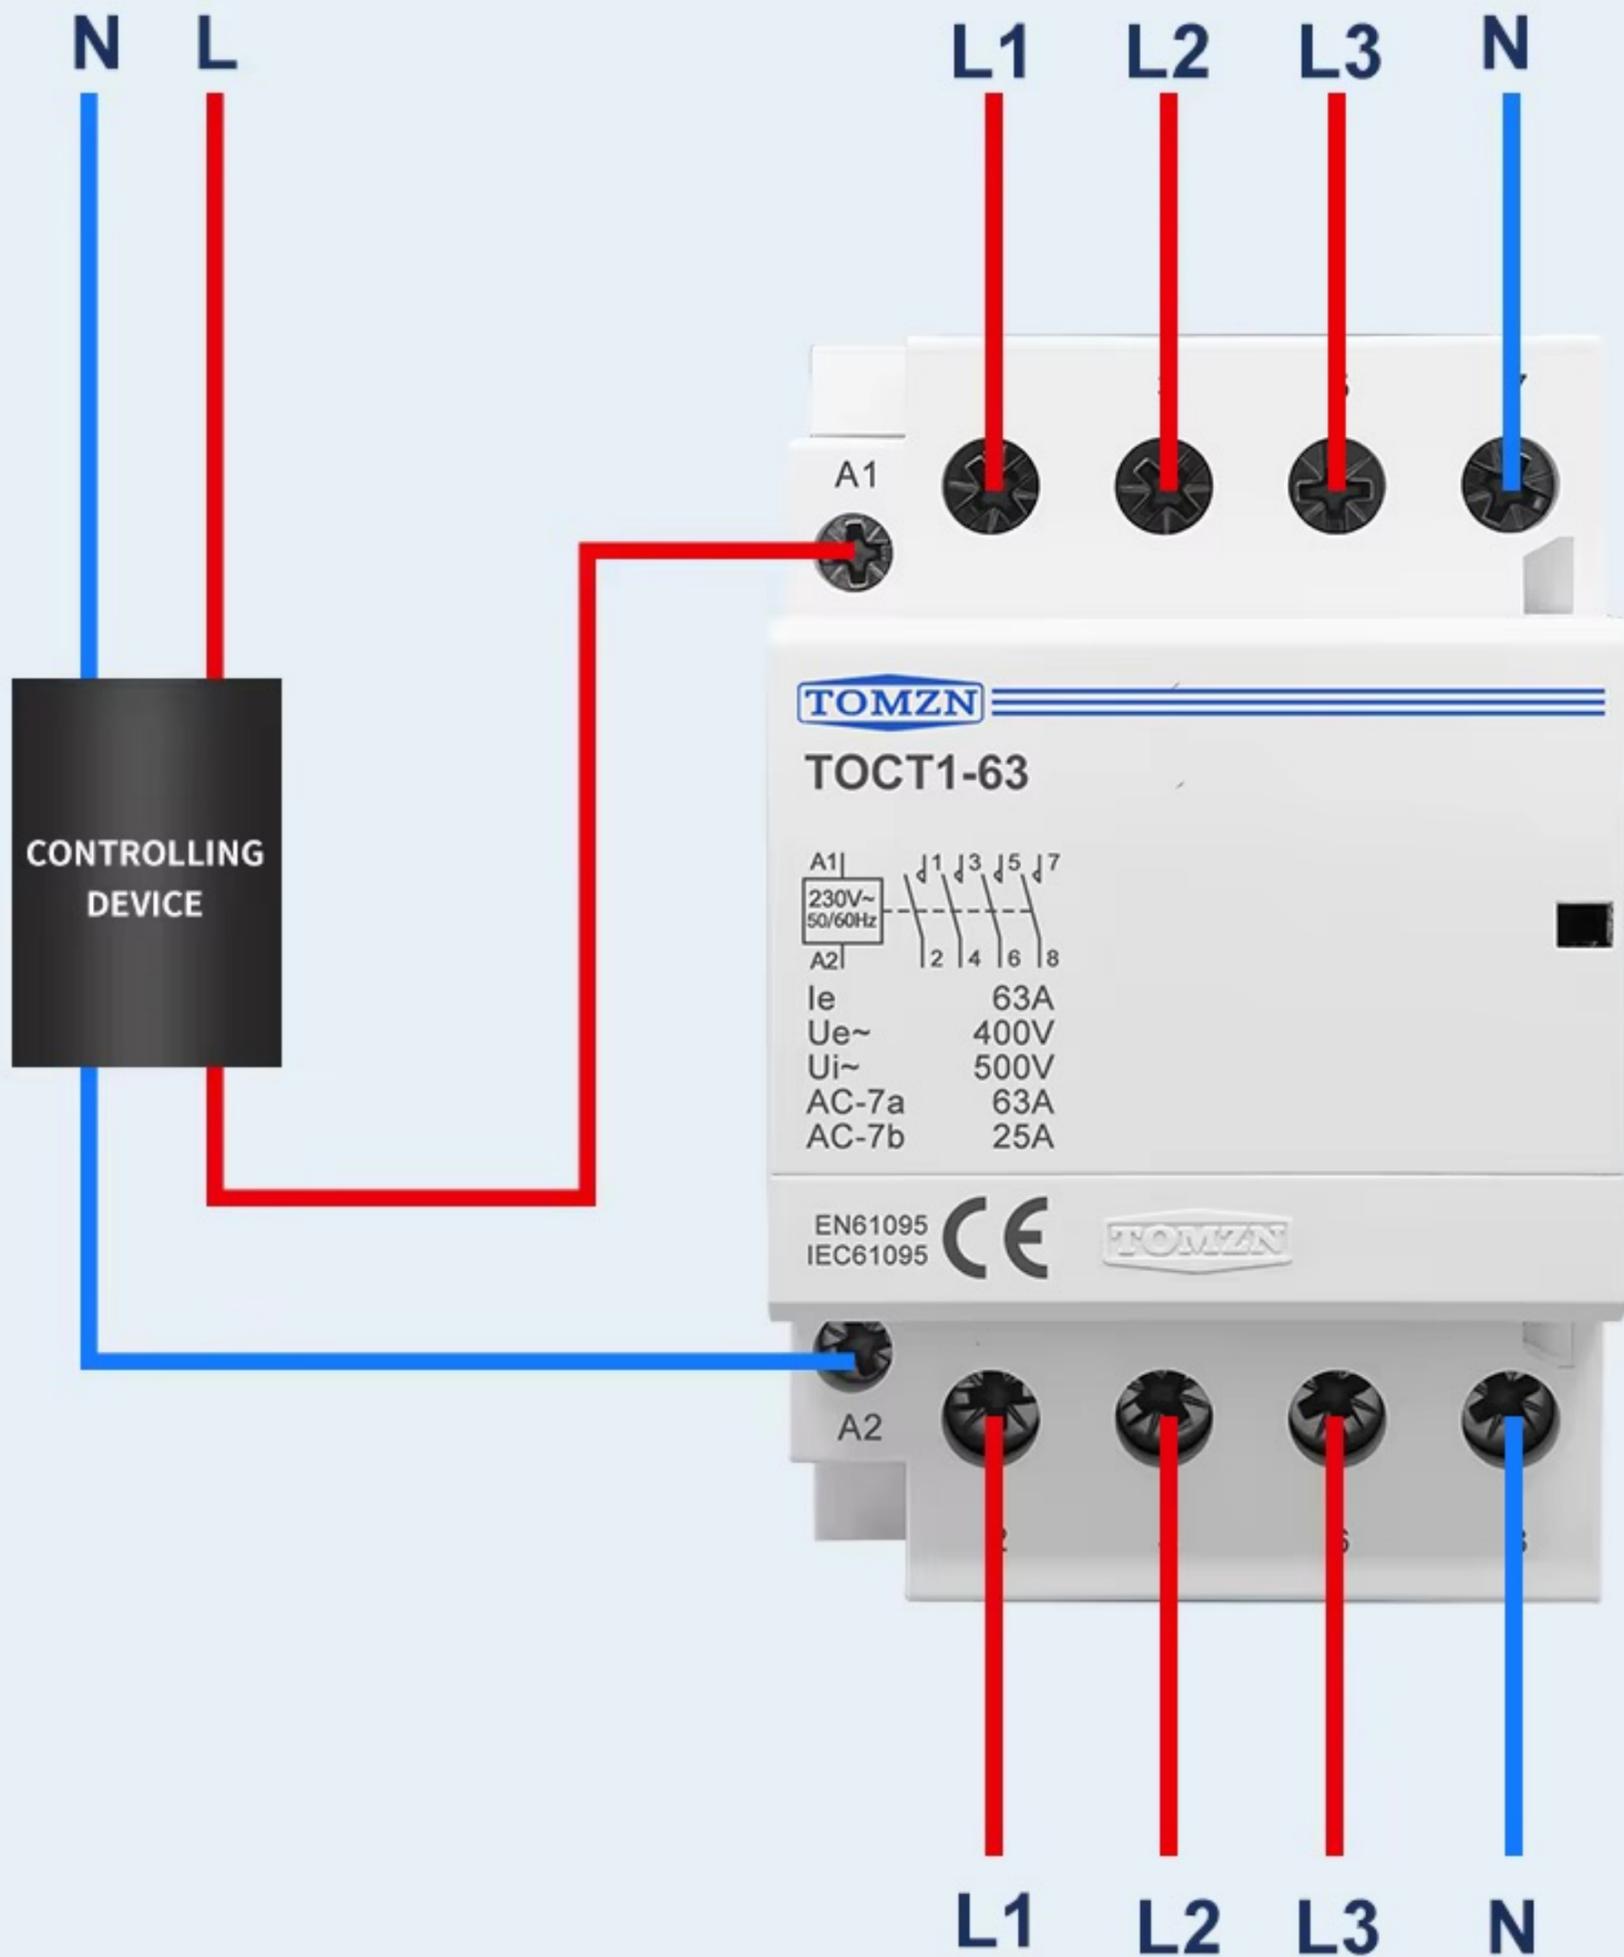

# PRODUCT PARAMETER

Contactor model		TOCT1-63
Rated insulation voltage (Ui) V		500
Rated operating voltage (Ue) V		400
Thermal continuous current (Ith) A		63A
Rated working current (Ie)	AC-7a A	63A
	AC-7b A	25A
Rated working power (Pe)	AC-7a kW	24
	AC-7b kW	8
Maximum number of switching operations/1h		30
Electrical life (times)		10x10 <sup>4</sup>
Mechanical life (times)		100x10 <sup>4</sup>

90mm

